


PLAN

N.T.S.

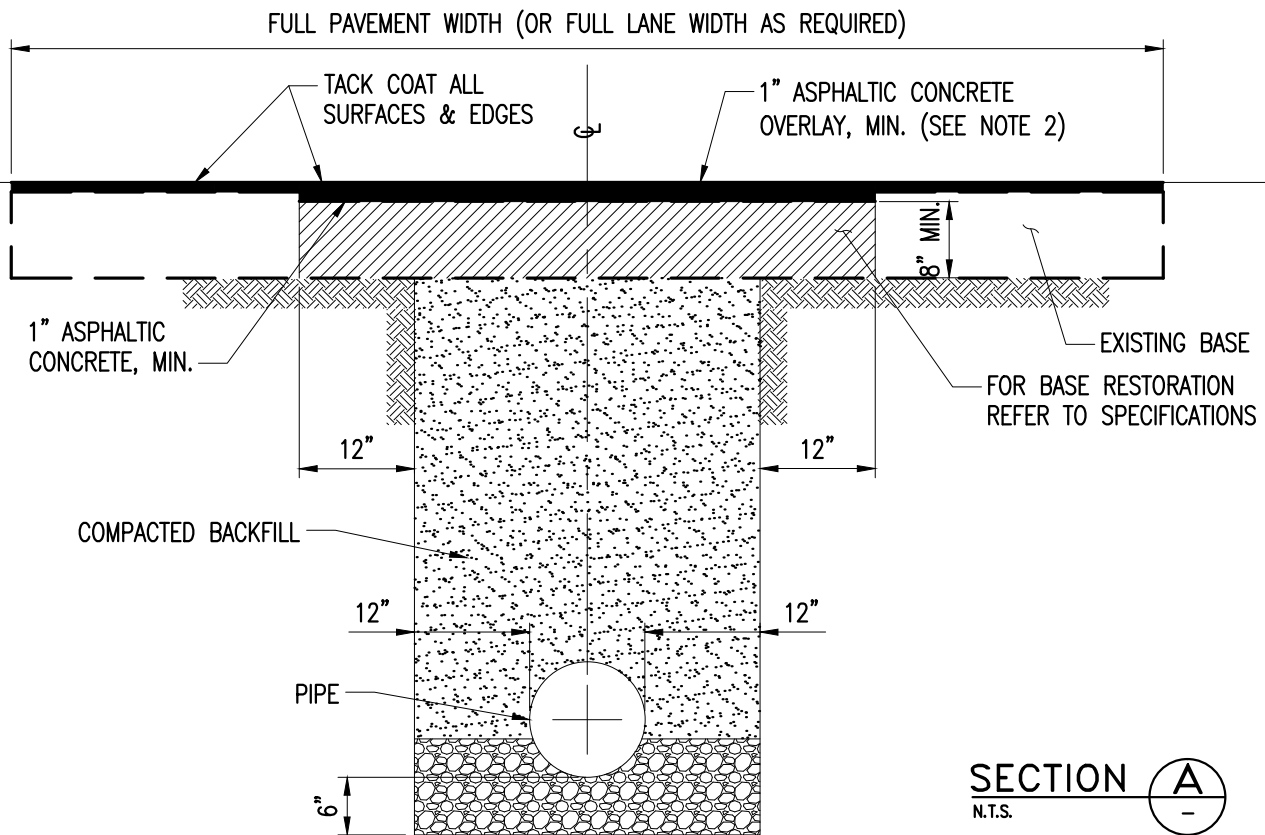

SECTION A
N.T.S.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL ASPHALTIC CONCRETE DRIVEWAYS OR OIL-SAND DRIVEWAYS SHALL BE REPLACED WITH TYPE I PAVEMENT RESTORATION. (REFER TO STANDARD DETAIL A 1.0).
2. FOR PAVEMENT RESTORATION, REFER TO F.D.O.T., MIAMI-DADE COUNTY PUBLIC WORKS OR SPECIFIC MUNICIPALITY STANDARDS.
3. FOR FDOT ROADS, MILL A MINIMUM OF 1½-INCH AND OVERLAY 1½-INCH WITH FRICTION COURSE 9.5 WITH RUBBER.
4. FOR MIAMI-DADE COUNTY ROADS, MILL 1-INCH AND OVERLAY 1-INCH.

ITEM	CROSS REF.	SPEC. REF.



ISSUE DATE	APPROVED BY
08/02/2013	J.B.F.

STANDARD DETAIL
**PAVEMENT RESTORATION
TYPE V**

A
1.1
SHEET 1 OF 1