



N.T.S.

<u>LEGEND:</u>

- A: NO VENTILATION OR VENTILATED LESS THAN 12 AIR CHANGES/HOUR
- B: CONTINUOUSLY VENTILATED AT 12 AIR CHANGES/HOUR
- C: CONTINUOUSLY VENTILATED AT 6 AIR CHANGES/HOUR
- D: NO VENTILATION OR VENTILATED LESS THAN 6 AIR CHANGES/HOUR NNV: NOT NORMALLY VENTILATED

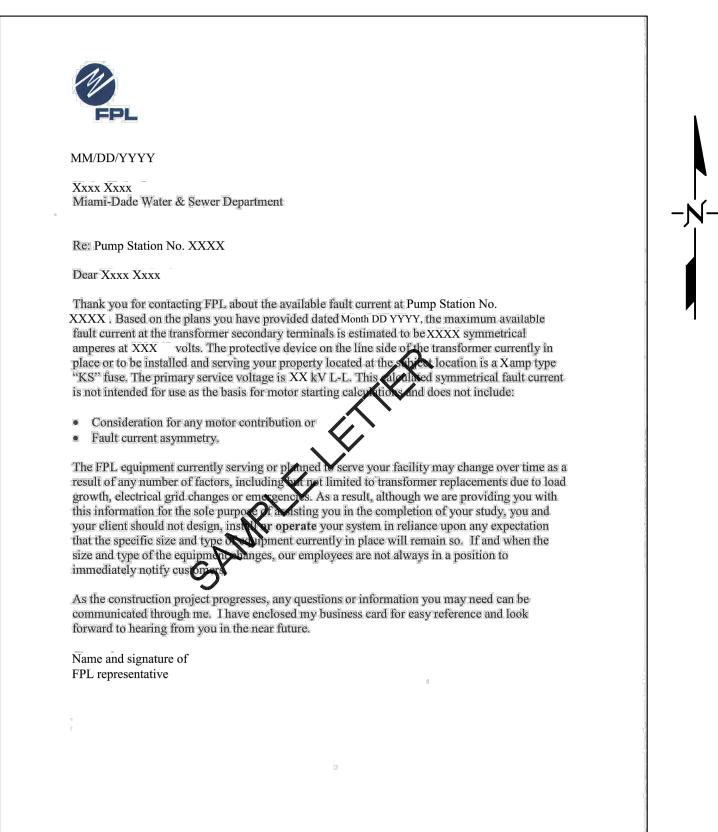

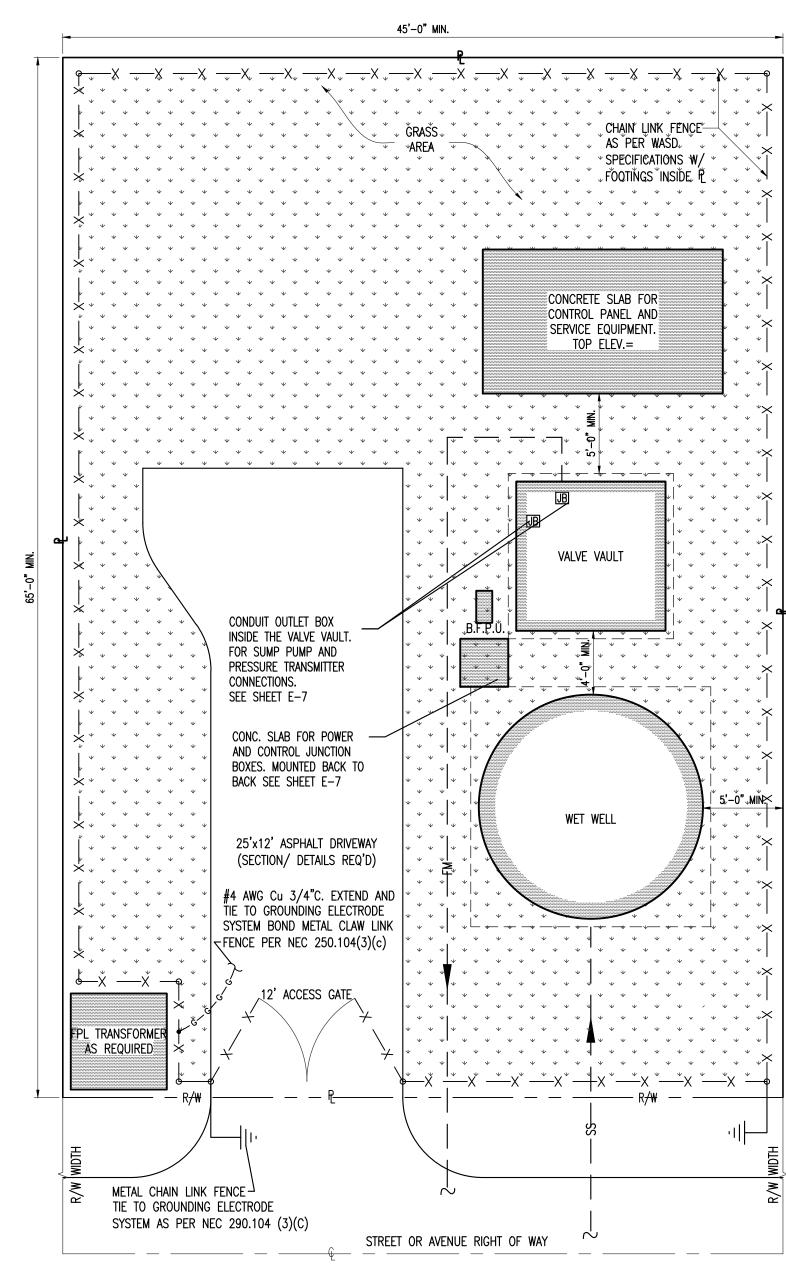

FLOOR PLAN:


SHOW/STATE ALL ELECTRICAL EQUIPMENT AND APPURTENANCES IN COMPLIANCE WITH NEC. 110-16. PROVIDE CIRCUIT NUMBERS AS RELATING TO PANEL SCHEDULE. CONDUCTORS AND CONDUIT SIZE. SPECIFY HAZARDOUS LOCATIONS.

SITE PLAN:

PROVIDE A SITE PLAN, SCALE: $1^{"}=6^{'}-0^{"}$, DEPICTING LOCATION OF BUILDINGS, STRUCTURES, PUMP STATION, POWER SERVICE POINT OR TRANSFORMER LOCATION, SERVICE COMPONENTS AND CONDUCTORS. IN ADDITION PROVIDE PROPERTY LIMIT OR EASEMENT BOUNDARY ACCORDING TO LEGAL DESCRIPTION.

NOTE:


IN CASE THE EXISTING VOLTAGE SYSTEM IS 240V, 30, AND THE PROPOSED PUMPS RATED AT 15 HP OR HIGHER THE ENGINEER SHALL VERIFY WITH FPL AND MDWASD IF IT IS REQUIRED TO INCREASE THE VOLTAGE SYSTEM TO 480Y/277V, 36.



SCALE: 1"=6'-0"

ELECTRICAL SCOPE OF WORK

- 1- COORDINATE THE ELECTRICAL SERVICE AND WORK WITH F.P.L PROJECT MANAGER MR. XXXX PHONE: (XXX) XXX-XXXX AND WITH PSIP CONSTRUCTION MANAGEMENT PERSONNEL.
- 2- AVAILABLE ELECTRICAL SERVICE AT THE STATION TO REMAIN AT 120/240V, 3PH, 4W OR REQUIRES UPGRADE TO 480/277V, 3PH, 4W. CONTRACTOR TO INSTALL NEW UNDERGROUND STATION SERVICE TO TRANSFORMER TO BE CONNECTED BY FPL.
- 3- COORDINATE WITH FPL REPRESENTATIVE TO PROVIDE TEMPORARY POWER SERVICE FOR STATION BYPASS.
- 4- ONCE THE STATION IS ON BYPASS, DISCONNECT AND REMOVE ALL ELECTRICAL EQUIPMENTS CURRENTLY SERVICING STATION. CONTACT FPL TO REQUEST SERVICE TO BE DISCONNECTED.
- IF APPLICABLE, EXISTING RTU PANEL AND ANTENNA TO BE RELOCATED SEE SUPPORT DETAILS X ON SHEET E-X.
- CONTRACTOR SHALL CONTACT MDWASD FOR REMOVAL OF SCADA RTU & ANTENNA. MDWASD WILL ISSUE THIS EQUIPMENT TO THE CONTRACTOR WHEN READY TO INSTALL. MDWASD PERSONNEL WILL CONNECT ALL WIRING TO AND FROM RTU AS WELL AS ANTENNA CABLING.
- 5- INSTALL ALL REQUIRED UNDERGROUND CONDUITS INCLUDING NEW GROUNDING SYSTEM, NEW ELECTRICAL SERVICE, NEW CONDUITS TO WET WELL AND VALVE PIT.
- 6- PROVIDE NEW CONCRETE PAD AS SHOWN ON PROPOSED SITE PLAN. PROVIDE NEW METER SOCKET, NEW MAIN DISCONNECT, AND NEW CONTROL PANEL. IF APPLICABLE, DISCONNECT AND REMOVE EXISTING DRY WELL PRESSURE TRANSDUCER CABLE, ABANDON CONDUIT IN PLACE. NEW CONDUIT SHALL BE ROUTED FROM EXISTING RTU ENCLOSURE TO NEW VALVE VAULT PRESSURE TRANSDUCER.
- 7- PROVIDE NEW MOTOR CONNECTION BOX. SEE DETAILS ON E-X. 8- CONNECT LOADS AS SHOWN IN THE SINGLE LINE DIAGRAM. PROVIDE ALL REQUIRED RACEWAYS AND CONDUCTORS FOR A COMPLETE POWER AND CONTROL SYSTEM.
- THIS IS AN EXAMPLE, IT IS THE DESIGN CONSULTANT'S RESPONSIBILITY TO DEVELOP A PROJECT SPECIFIC SOW

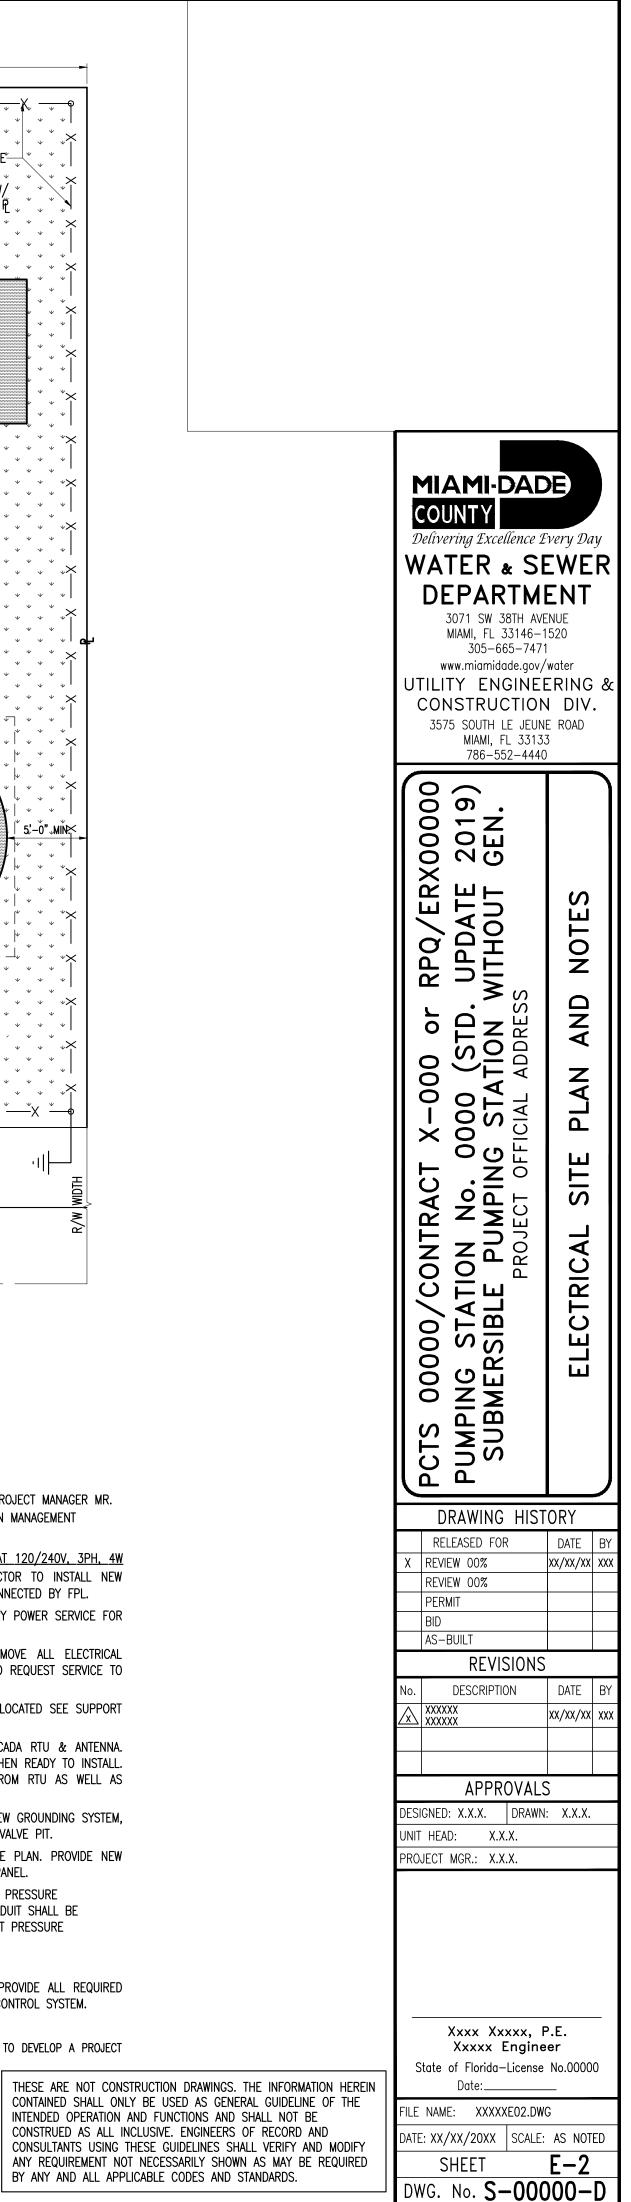

CONTAINED SHALL ONLY BE USED AS GENERAL GUIDELINE OF THE
INTENDED OPERATION AND FUNCTIONS AND SHALL NOT BE
CONTAINED SHALL ONLY BE USED AS GENERAL GUIDELINE OF THE INTENDED OPERATION AND FUNCTIONS AND SHALL NOT BE CONSTRUED AS ALL INCLUSIVE. ENGINEERS OF RECORD AND CONSULTANTS USING THESE GUIDELINES SHALL VERIFY AND MODIF
CONSULTANTS USING THESE GUIDELINES SHALL VERIFY AND MODIF
I ANY REQUIREMENT NOT NECESSARILY SHOWN AS MAY BE REQUIRE
BY ANY AND ALL APPLICABLE CODES AND STANDARDS.